



第2回バイオインフォマティクス実習コース
横浜市大 先端医科学研究センター
バイオインフォマティクス研究室

室長 田村智彦

准教授 中林潤

免疫学 藩龍馬

小泉真一

- マイクロアレイデータの可視化
- 樹形図
- 散布図、MA-Plot
- ヒートマップ


コマンド入力時の注意事項

- a) 大文字、小文字は区別する
- b) スペースは入力する必要はない
- c) 配布資料中の **↵** はenterキー
- d) 配布資料中の“**¥**”はバックスラッシュ
- e) ↑キーで入力のやり直しができる

答え合わせ

- 課題 GSE26910からデータを取得し、正規化、ファイルへの出力を行う
- 足りないライブラリ

pd.hg.u133.plus.2

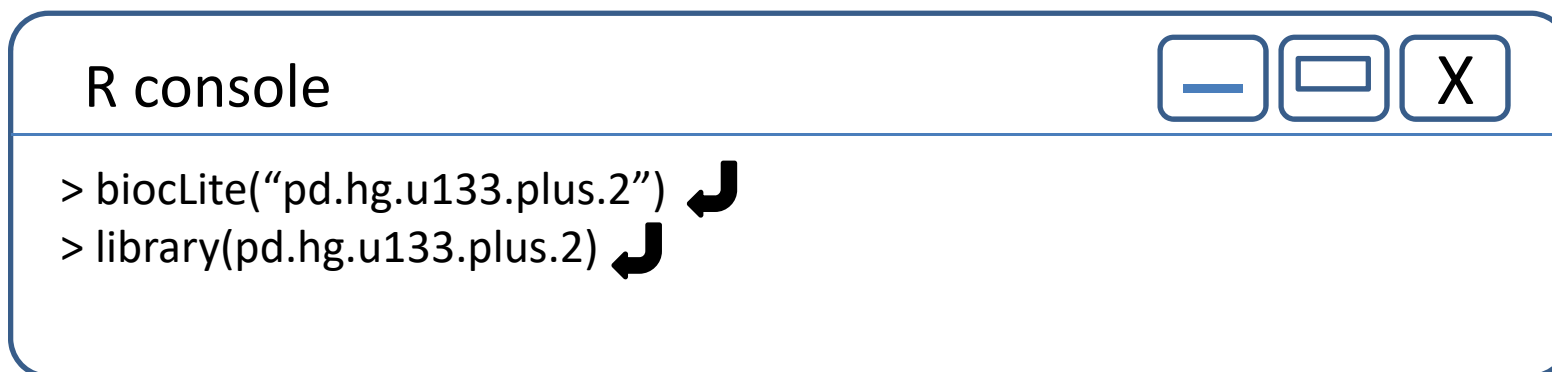

```
R console
> biocLite("pd.hg.u133.plus.2")
> library(pd.hg.u133.plus.2)
```

Submission date Jan 27, 2011
 Last update date Dec 03, 2014
 Contact name Paolo Provero
 E-mail paolo.provero@unito.it
 Organization name University of Turin
 Department Molecular Biotechnology and Health Sciences
 Street address Via Nizza 52
 City Torino
 ZIP/Postal code I-10100
 Country Italy

Platforms (1) [GPL570 \[HG-U133_Plus_2\]](#) Affymetrix Human Genome U133 Plus 2.0 Array

Samples (24)
[More...](#)
[GSM662756](#) prostate normal 1
[GSM662757](#) prostate tumor 1
[GSM662758](#) prostate normal 2

Relations
 BioProject [PRJNA136171](#)


Analyze with GEO2R

Download family	Format
SOFT formatted family file(s)	SOFT ?
MINiML formatted family file(s)	MINiML ?
Series Matrix File(s)	TXT ?


Supplementary file	Size	Download	File type/resource
GSE26910_RAW.tar	104.1 Mb	(http)(custom)	TAR (of CEL)

Raw data provided as supplementary file
Processed data included within Sample table

platform
 Human
 Genome
 U133
 Plus 2.0



- PC起動 各自のアカウントでログイン
- R起動 スタートメニュー 4.統計解析ツール
- Proxyの設定

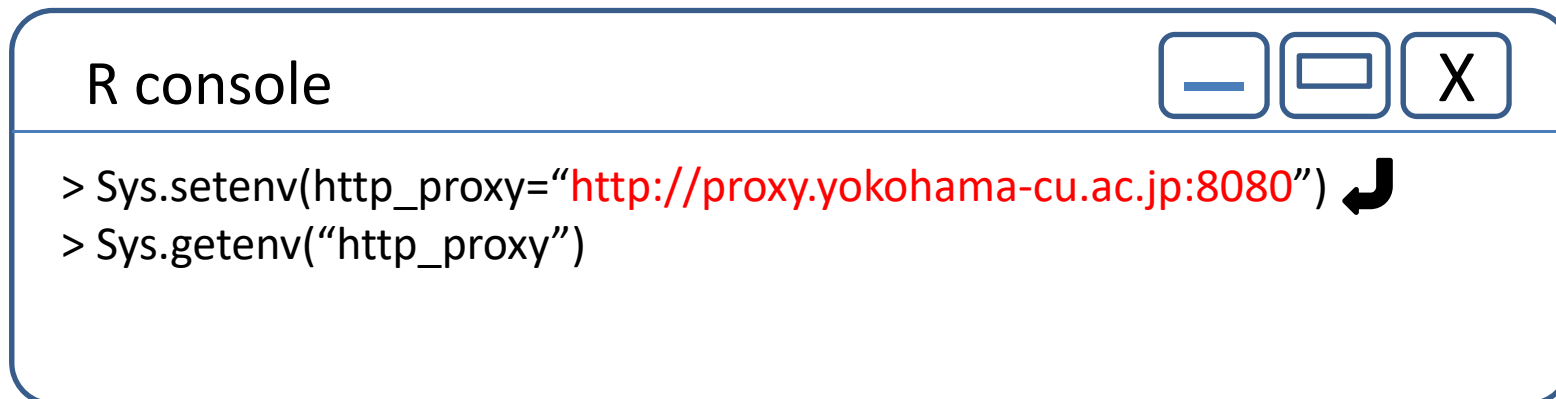

R console


```
> Sys.setenv(http_proxy="http://proxy.yokohama-cu.ac.jp:8080")  
> Sys.getenv("http_proxy")
```

The image shows a screenshot of an R console window. The window title is "R console". The console output shows two lines of R code: the first line sets the environment variable http_proxy to "http://proxy.yokohama-cu.ac.jp:8080", and the second line retrieves the value of http_proxy. The URL in the first line is highlighted in red. There are standard window control buttons (minimize, maximize, close) in the top right corner.

正規化後の遺伝子発現ファイル

- 課題配布フォルダ
→GSE40493→GSE40493_Normalized.txt
- 各自のデスクトップフォルダ →GSE40493フォルダにコピー

作業ディレクトリを変更

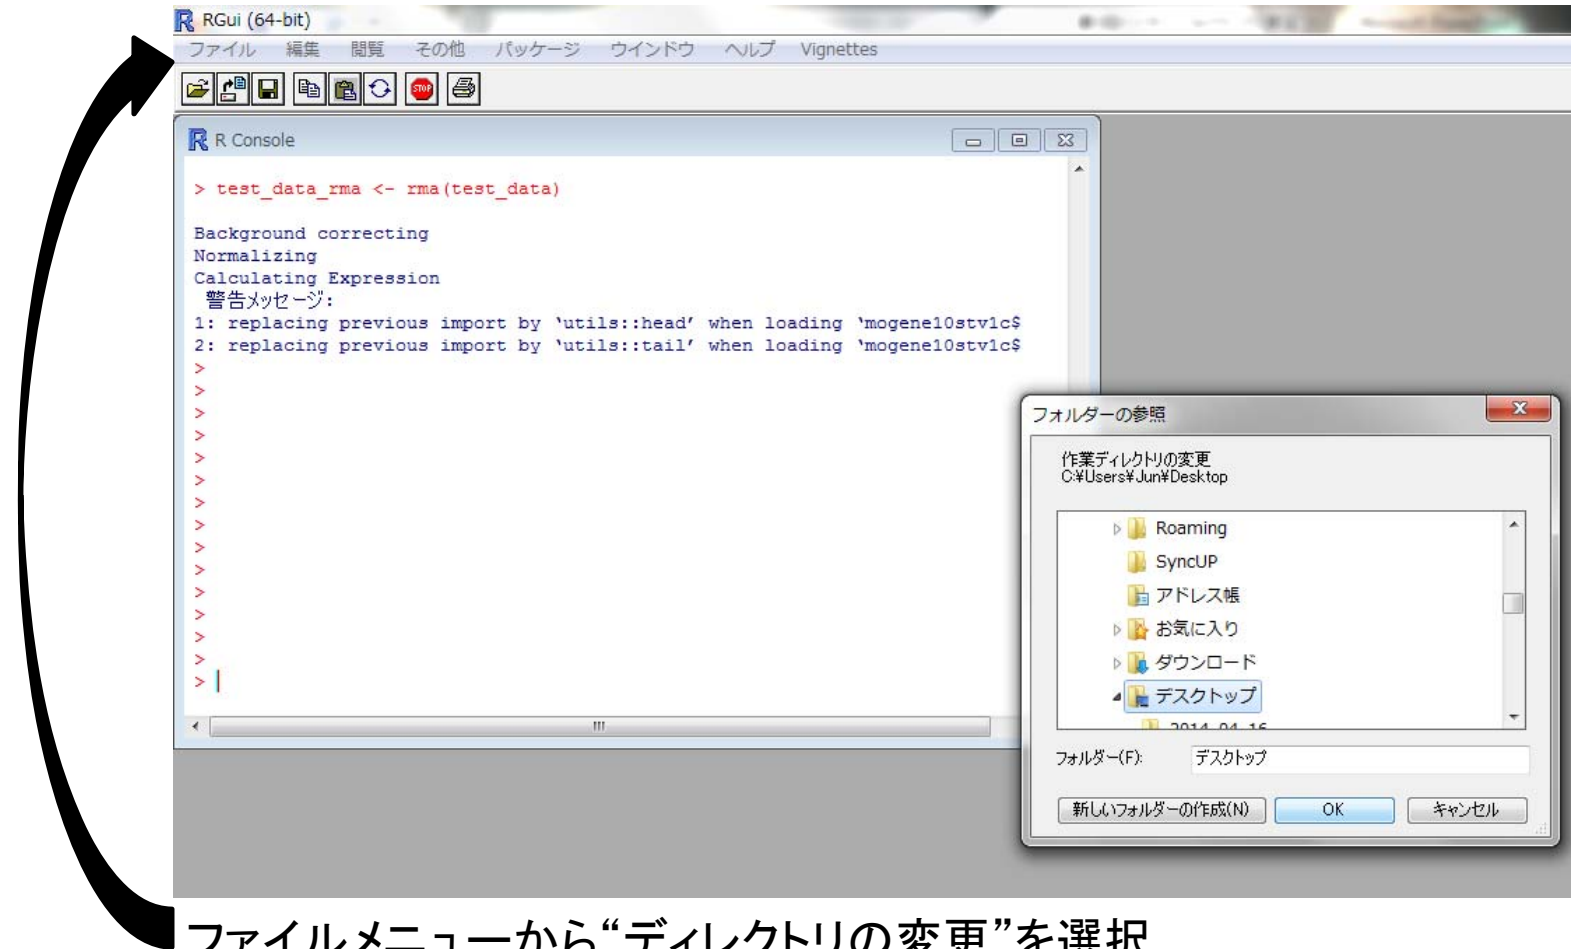

ファイルメニューから“ディレクトリの変更”を選択
各自のデスクトップ→GSE40493フォルダを選択

ファイルの読み込み

```
R console [-] [ ] [X]  
> x <- read.table("GSE40493_Normalized.txt", header=T, sep="¥t") ↵  
> head(x)
```


GEOデータベース

http://ncbi.nlm.nih.gov

The screenshot shows the NCBI website interface. A dropdown menu is open under 'All Databases', with 'GEO DataSets' highlighted. A search bar is visible at the top right. On the right side, there are sections for 'Popular Resources' (including PubMed, Bookshelf, etc.) and 'NCBI Announcements'. At the bottom, a Windows taskbar is visible with icons for Internet Explorer, File Explorer, Chrome, and R.

**GEO Datasets
を選択**

**アクセッション番号を入力
GSE40493**

Platform情報の取得

NCBI GEO Accession viewer

www.ncbi.nlm.nih.gov/geo/query/acc.cgi?acc=GSE40493

NCBI GEO Accession Display

Scope: Self Format: HTML Amount: Quick GEO accession: GSE40493

Series GSE40493 Query DataSets for GSE40493

Status: Public on Dec 05, 2012

Title: Bcl6-deficient regulatory T cells

Organism: Mus musculus

Experiment type: Expression profiling by array

Summary: gene expression data from wild-type and Bcl6^{-/-} regulatory T cells in order to find genes regulated by Bcl6 in Treg cells

Overall design: FoxP3⁺ Tregs were sorted from wild-type (WT) and Bcl6^{-/-} (KO) mice-- 8 samples, 2 from each type of Treg, 2 WT and 2 KO

Contributor(s): Dent AL, Sawant DV

Citation(s): Sawant DV, Sehra S, Nguyen ET, Jadhav R et al. Bcl6 controls the Th2 inflammatory activity of regulatory T cells by repressing Gata3 function. *J Immunol* 2012 Nov 15;189(10):4759-69. PMID: 23053511

Submission date: Aug 30, 2012

Last update date: Dec 02, 2014

Contact name: Alexander Dent

E-mail: adent2@iupui.edu

Phone: 317 274-7524

Fax: 317 274-7524

Organization name: Alexander Dent

Street address: 950 W. Walnut St. R2 302, Walther Oncology Center

City: Indianapolis

State/province: IN

ZIP/Postal code: 46202

Country: USA

Platforms (1): GPL6246 [MoGene-1_0-st] Affymetrix Mouse Gene 1.0 ST Array [transcript (gene) version]

Platform

Platform情報の取得

known genes (multipart).
mrna_assignment Description of the public mRNAs that should be detected by the sets within this transcript cluster based on sequence alignment (multipart).
category Array design category of the transcript cluster

Data table

ID	GB_LIST	SPOT_ID	seqname	RANGE_
10344614		chr1:3044314-3044814	chr1	NC_0000
10344616		chr1:3092097-3092206	chr1	NC_0000
10344618		chr1:3266404-3267429	chr1	NC_0000
10344620		chr1:3670652-3670993	chr1	NC_0000
10344622	NM_024221, BC094468	chr1:4761212-4762280	chr1	NC_0000
10344624	NM_008866, BC013536	chr1:4797943-4836817	chr1	NC_0000
10344633	NM_011541, NM_001159750, NM_001159751, BC083127	chr1:4847895-4887990	chr1	NC_0000
10344637	NM_133826, BC009154	chr1:5073253-5152630	chr1	NC_0000
10344653	NM_011011, L11065	chr1:5578574-5592947	chr1	NC_0000
10344658	NM_009826, AB070619, AB050017, BC150774, AK165119, AK076550, AK020027, AK033709	chr1:6204743-6265656	chr1	NC_0000
10344674	NM_001195732	chr1:6349422-6381175	chr1	NC_0000
10344679	NM_173868, BC118528	chr1:6720132-6851021	chr1	NC_0000
10344705		chr1:6864053-6864139	chr1	NC_0000
10344707	NM_183028, BC110360	chr1:7079231-7163709	chr1	NC_0000
10344713	NM_016661, L32836	chr1:7167820-7169118	chr1	NC_0000
10344715	AK036865	chr1:7488080-7488381	chr1	NC_0000
10344717		chr1:8806219-8806328	chr1	NC_0000
10344719		chr1:8846844-8847185	chr1	NC_0000
10344721		chr1:0448751-0448853	chr1	NC_0000

Total number of rows: 35557
Table truncated, full table size 32596 Kbytes.

[Download full table...](#)

[Annotation SOFT table...](#)

Download family **Format**
SOFT formatted family file(s) SOFT
MINIMI

Download full tableをクリック

array ID ↔ その他の ID

Data table

ID	GB_LIST	SPOT_ID	seqname	RANGE_
10344614		chr1:3044314-3044814	chr1	NC_0000
10344616		chr1:3092097-3092206	chr1	NC_0000
10344618		chr1:3266404-3267429	chr1	NC_0000
10344620		chr1:3670652-3670993	chr1	NC_0000
10344622	NM_024221, BC094468	chr1:4761212-4762280	chr1	NC_0000
10344624	NM_008866, BC013536	chr1:4797943-4836817	chr1	NC_0000
10344633	NM_011541, NM_001159750, NM_001159751, BC083127	chr1:4847895-4887990	chr1	NC_0000
10344637	NM_133826, BC009154	chr1:5073253-5152630	chr1	NC_0000
10344653	NM_011011, L11065	chr1:5578574-5592947	chr1	NC_0000
10344658	NM_009826, AB070619, AB050017, BC150774, AK165119, AK076550, AK020027, AK033709	chr1:6204743-6265656	chr1	NC_0000
10344674	NM_001195732	chr1:6349422-6381175	chr1	NC_0000
10344679	NM_173868, BC118528	chr1:6720132-6851021	chr1	NC_0000
10344705		chr1:6864053-6864139	chr1	NC_0000
10344707	NM_183028, BC110360	chr1:7079231-7163709	chr1	NC_0000
10344713	NM_016661, L32836	chr1:7167820-7169118	chr1	NC_0000
10344715	AK036865	chr1:7488080-7488381	chr1	NC_0000
10344717		chr1:8806219-8806328	chr1	NC_0000
10344719		chr1:8846844-8847185	chr1	NC_0000
10344721		chr1:9448751-9448853	chr1	NC_0000

Total number of rows: 35557

Table truncated, full table size 32506 Kbytes

Platform情報の取得

- 課題配布フォルダ
→BioInfoJishu→GPL_6246-
21513_ID_NAME
- 各自のデスクトップのGSE40493フォルダに
コピー

IDファイルの読み込み アレイIDと遺伝子名の関連付け

R console



```
> id <- read.table("GPL6246_21513_ID_NAME.txt", header=T, sep="¥t") ↵
```

```
> head(id) ↵
```

```
> x_id <- merge(id, x, by.x="ID", by.y="X") ↵
```

```
> head(x_id) ↵
```

`merge(A, B, by.x="Aの項目", by.y="Bの項目")`
AとBを項目Aと項目Bとで関連付け

階層的クラスタリングと樹形図

距離行列

階層的クラスタリング


樹形図

R console

```
> tx <- t(x[,3:10])  
> tx_dist <- dist(tx)  
> tx_cluster <- hclust(tx)  
> plot(tx_cluster)
```

天地行列 t(行列)
距離行列 dist(行列)
hclust(距離行列)

図のPDFファイルを保存

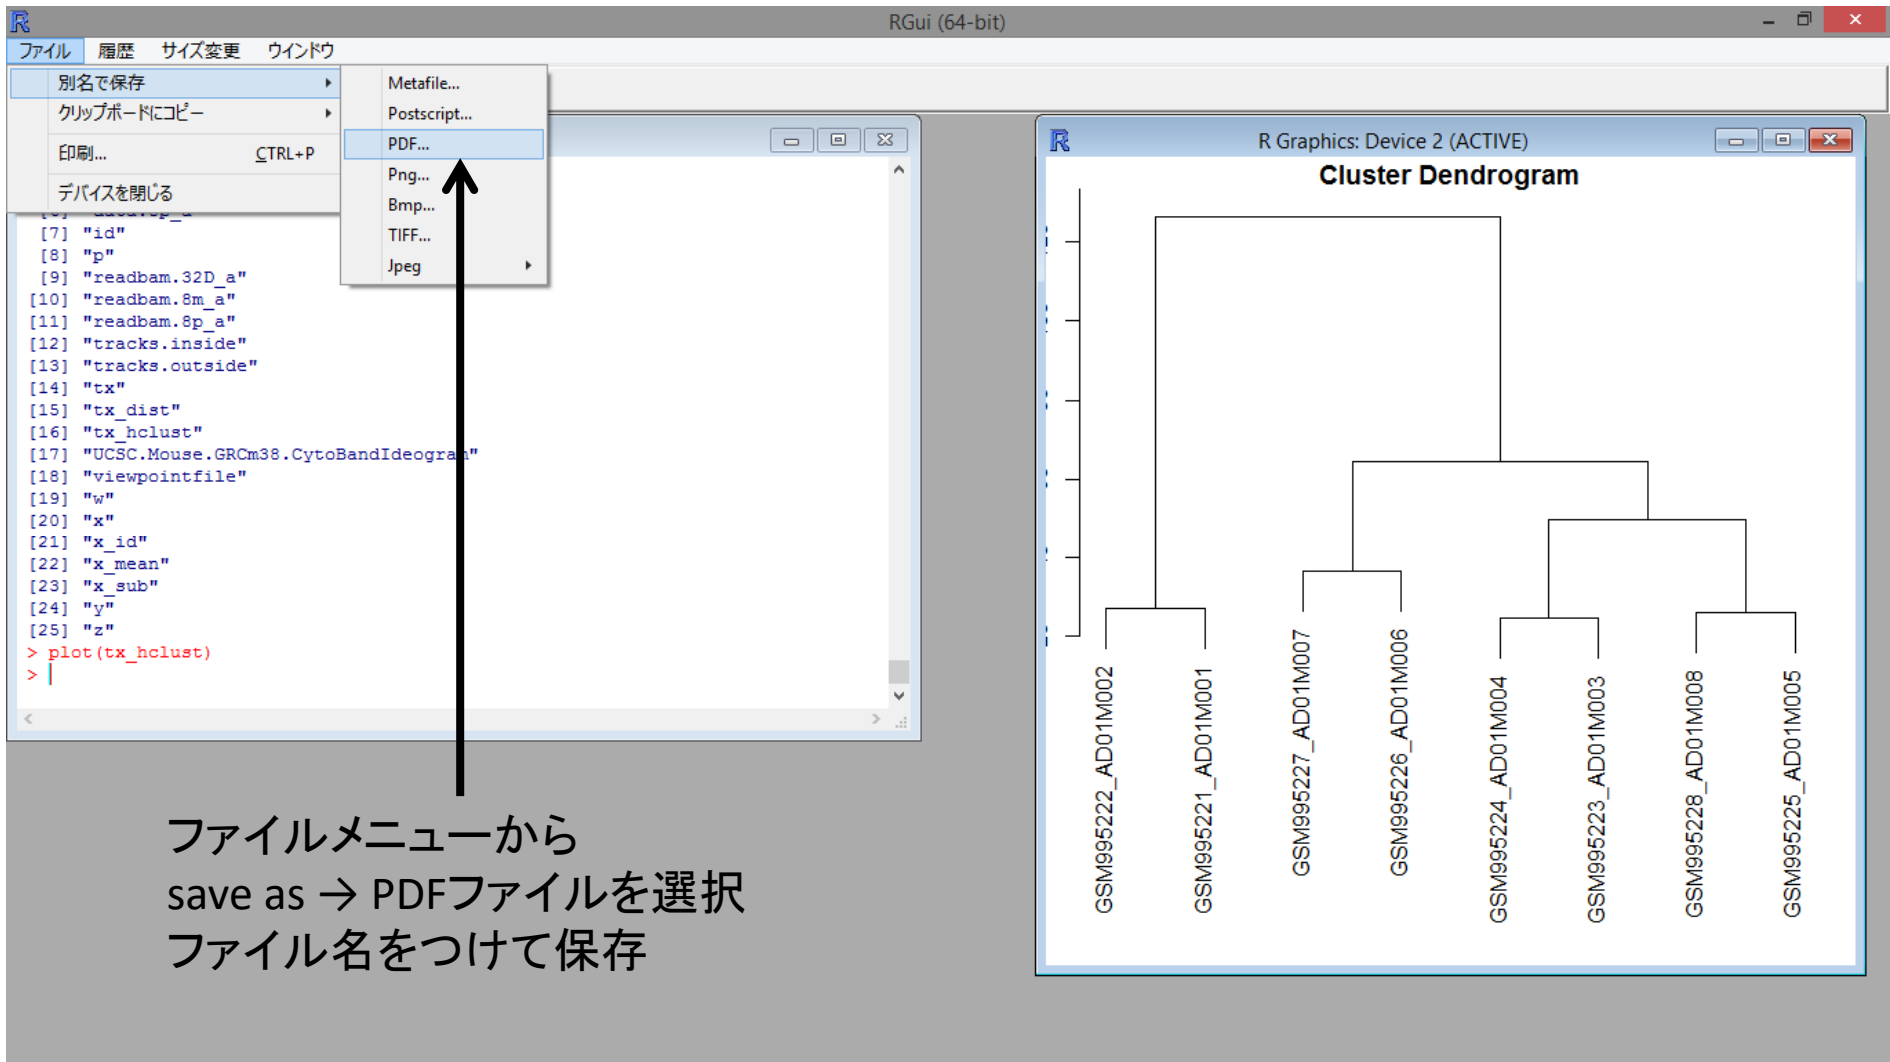

The screenshot shows the RGui (64-bit) interface. The 'File' menu is open, and the 'PDF...' option is highlighted. A black arrow points from the 'PDF...' option down to the Japanese text below. The main window displays a 'Cluster Dendrogram' plot with the following labels on the x-axis:

- GSM995222_AD01M002
- GSM995221_AD01M001
- GSM995227_AD01M007
- GSM995226_AD01M006
- GSM995224_AD01M004
- GSM995223_AD01M003
- GSM995228_AD01M008
- GSM995225_AD01M005

Below the plot, the following Japanese text provides instructions:

ファイルメニューから
save as → PDFファイルを選択
ファイル名をつけて保存

散布図

```
plot(x値, y値, option)
option : type = "p" or "l" or "b"
        xlab = "x軸名"
        ylab = "y軸名"
        pch = ・の種類 (数字)
        col = "色"
```

R console



```
> plot(x_id[,3], x_id[,4], xlab="KO1_1", ylab="KO1_2", main = "Scatter Plot", pch=20) ↵
> plot(x_id[,3], x_id[,7], xlab="KO1_1", ylab="WT1_1", main = "Scatter Plot", pch=20) ↵
```

MA-Plot

R console



```
> plot((x_id[,4] + x_id[,3]) / 2, x_id[,4] - x_id[,3], xlab="A", ylab="M",  
+ main = "MA-Plot", ylim = c(-7, 7), pch=20) ↵  
> plot((x_id[,7] + x_id[,3]) / 2, x_id[,7] - x_id[,3], xlab="A", ylab="M",  
+ main = "MA-Plot", ylim = c(-7, 7), pch=20) ↵
```

WT1の平均値とKO1の平均値の行列を生成
WT/KO > 2の遺伝子を選別


R console



```
> x_mean <- cbind((x_id[,3] + x_id[,4]) / 2, ↵  
+ (x_id[,7] + x_id[,8]) / 2) ↵  
> x_mean <- data.frame(x_mean) ↵  
> rownames(x_mean) <- x_id$GeneName ↵  
> colnames(x_mean) <- c("KO", "WT") ↵  
> head(x_mean) ↵  
> x_sub <- subset(x_mean, x_mean$WT / x_mean$KO > 1.1) ↵  
> nrow(x_sub) ↵  
> head(x_sub) ↵
```

cbind(ベクトル1, ベクトル2, ...)

Bioconductor, biocLiteの設定

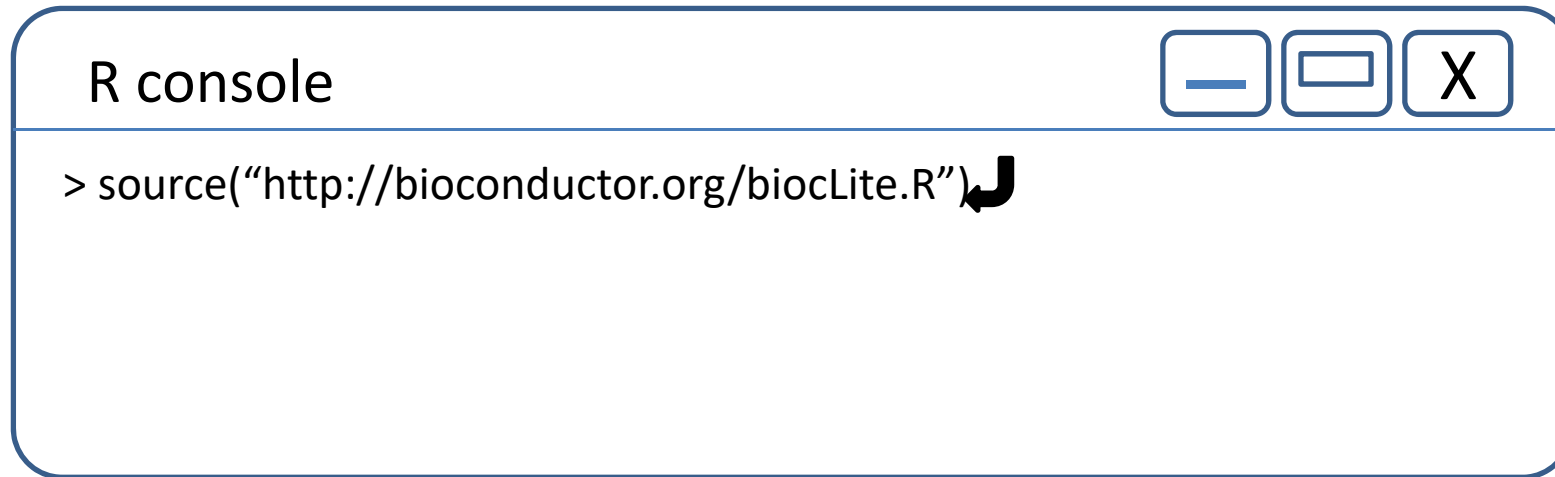

R console

```
> source("http://bioconductor.org/biocLite.R")
```

The image shows a screenshot of an R console window. The window title is "R console". The command prompt shows the command `> source("http://bioconductor.org/biocLite.R")` followed by a carriage return symbol. The window has standard OS window controls (minimize, maximize, close) in the top right corner.

Bioconductor

バイオインフォマティクス関連のパッケージを配布しているサイト

biocLite.R

バイオインフォマティクス関連のパッケージをインストールするインストーラ
パッケージ間の依存関係やバージョンの整合性を調整してくれる。

package “gplots”
heatmap.2

R console



```
> biocLite("gplots") ↵  
> library(gplots) ↵  
> heatmap.2(as.matrix(x_sub), trace = "none", density.info = "none", ↵  
+ col = greenred(75), cexCol = 2.0, cexRow = 0.25) ↵
```

課題

- GSE26910のデータについても樹形図、散布図、MA-plot、ヒートマップを描いてください。